



ReSound – Acoustic Panels, Rafts & Baffles

Operation & Maintenance Manual

www.creatif.org.uk

02_Contents

Thank you for choosing ReSound, eco-friendly acoustic panels from Creatif.

Designed to improve acoustic comfort and reduce reverberation, the panels are the perfect fit for a wide range of locations.

And by using fabric wrap instead of paint to colour the panels, ReSound is the strongest on market and ideal for a snag-free installation.

This guide is designed to walk you through how to look after your ReSound panel(s).

For technical drawings, please contact Creatif.

Page 03

Operations Guide

Page 04

Maintenance

Page 05

Technical Information & Acoustic Performance

Page 06

Contact

Servicing

Do you have a problem with your ReSound panels, other acoustic issues or want to ask a question?

Email: service@creatif.org.uk




Guarantees

All materials are guaranteed for 12 months from the date of installation, with the exception of damage caused as a result of misuse or neglect.

03_Operation Guide

As they are fixed to either the ceiling or wall, just be mindful of their fixing point and do not place any unnecessary stress upon the panels as this may cause them to come loose.

All Rafts and Baffles are attached via a cable kit. Wall-mounted panels are fixed via a series of Impaler Clips and as such, take care if you do decide to remove the panel.

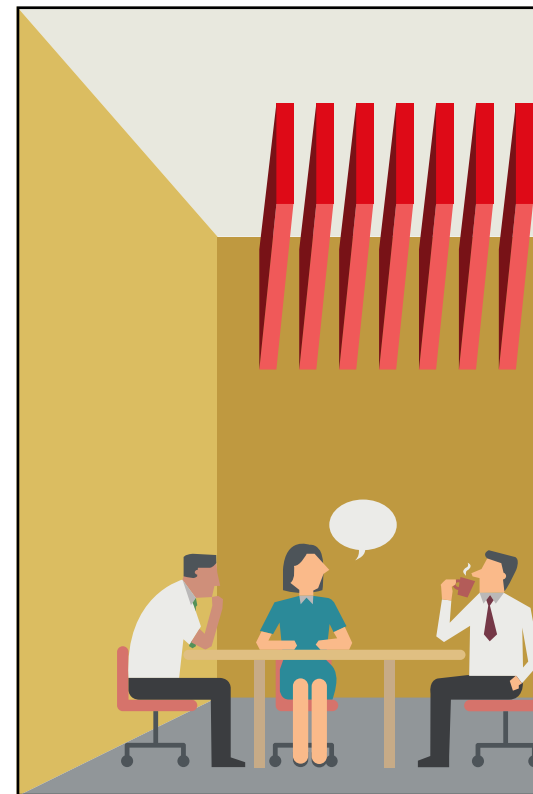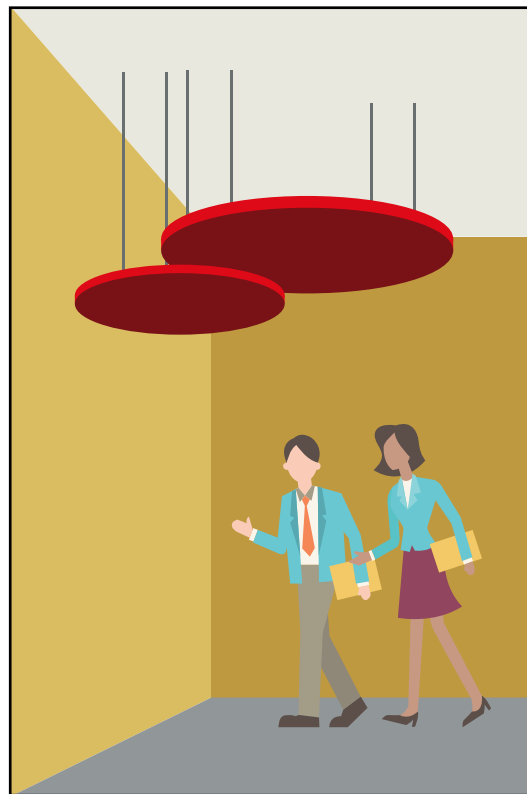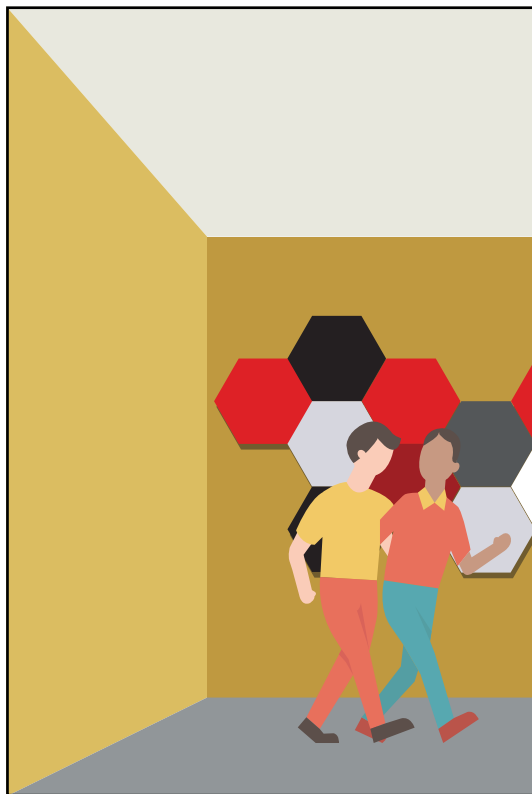


04_Maintenance

As ReSound panels are fabric-wrapped rather than painted, they little in the way of cleaning or maintenance.

You can use a vacuum cleaner with a soft brush attachment to remove surface dirt and dust, and any light stains can be removed by using a cloth and warm water.

A proprietary carpet spot cleaner may also be used, though a small area should be tested before doing the rest of the area to ensure that the fabric is not adversely affected.

Do not use bleach or similarly harsh chemicals as these may permanently stain the fabric.

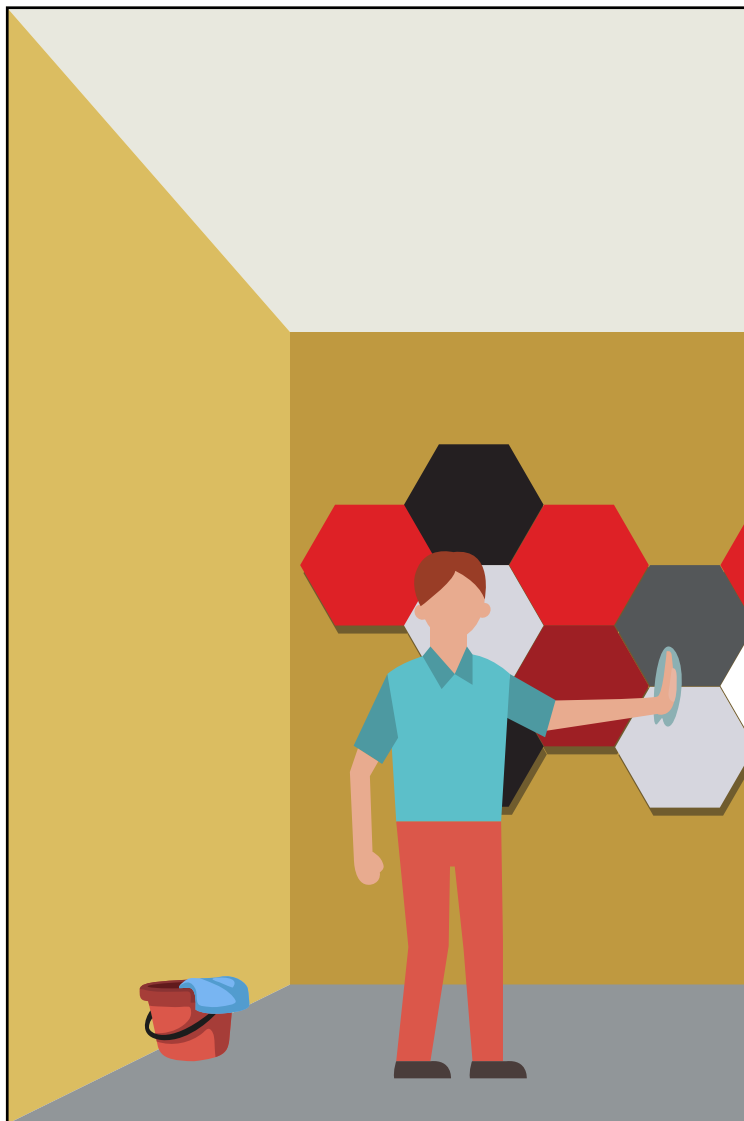


05_ Fire Safety and Acoustic Performance

ReSound core board has been tested and offers Class 0 fire rating to BS476: Part 6. Fabric facing complies with Class 1 to BS476: Part 7.


Class 0 fabrics can be supplied on request.

Baffles have been tested and offers Euroclass A2-s1, d0 in accordance with EN 13501 -1


Wall-Mounted – 25mm

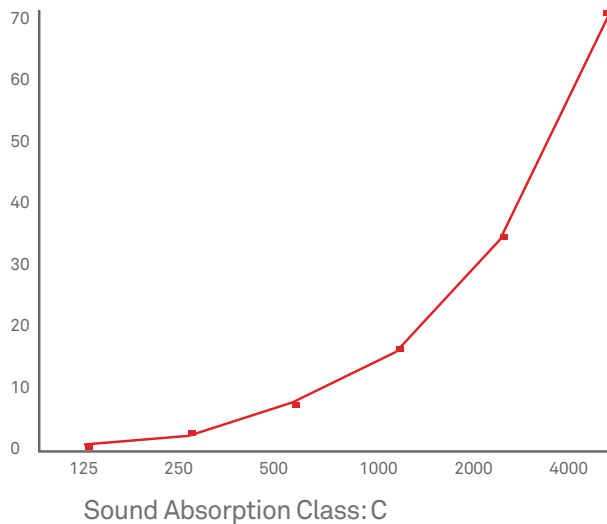


Wall-Mounted – 40mm

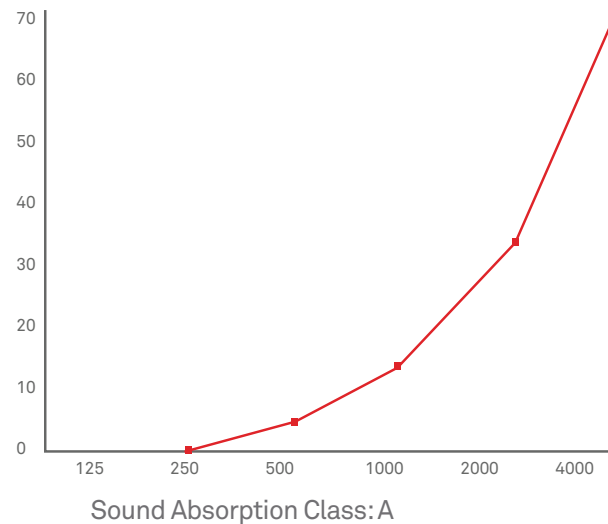

Baffles

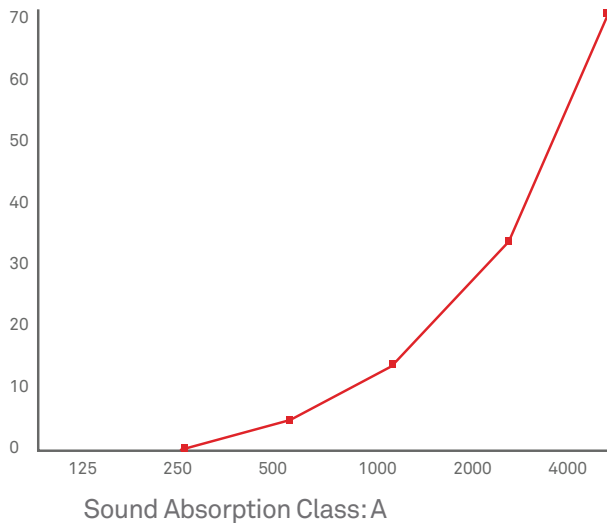

Rafts

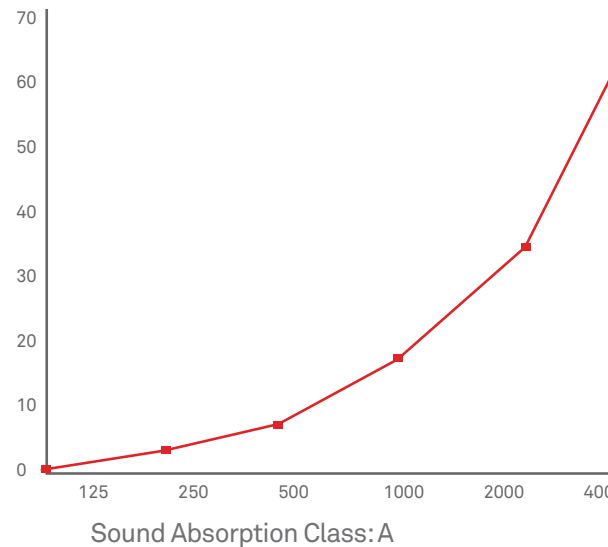

06_Contact

If you have any questions about your ReSound panel(s), please get in touch;

T: +44 (0) 113 270 1239

E: service@creatif.org.uk

www.creatif.org.uk



Do you have a question?

Want to discuss servicing options?

Get in touch!